


Vas Track

Rapid exchange
PTCA Balloon catheter

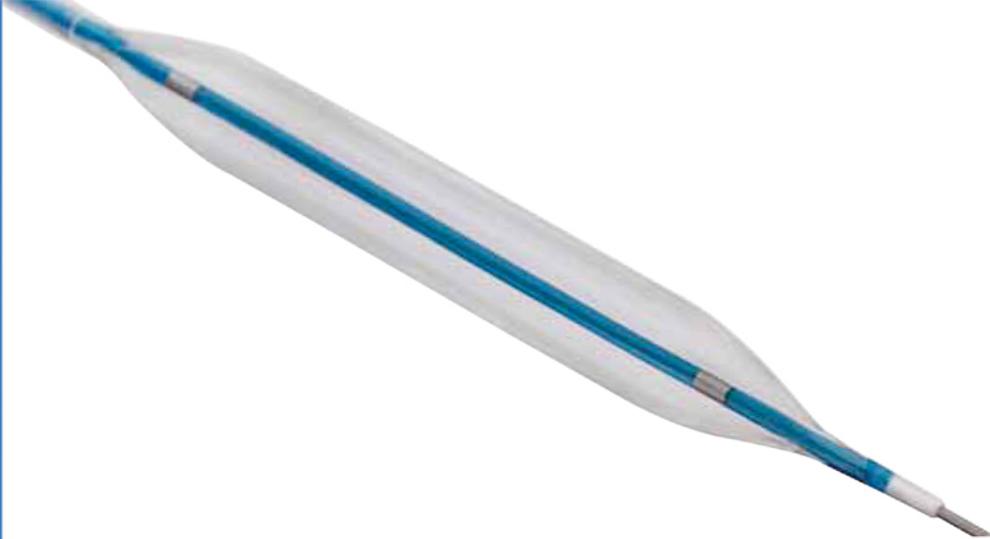

Vas Track - is designed for PTCA procedures that demand high push ability and cross ability from the balloon catheter. Vas Track PTCA catheter encompasses a low complaint, high pressure balloon which ensures an improved myocardial blood flow in localized stenotic lesion of the coronary arteries.

The feature of Vas Track gives it an added advantage as stent delivery catheter. The high pressure, low complaint balloon material facilitates the optimal crimp and predictable deployment of stents. The less complaint nature of the balloon allows uniform expansion of stent with the balloon.



Optimal design for torturous lesions.

Technical Specifications	
Entry Profile	0.017"
Balloon Material	Nylon
Balloon Material Type	Semi compliant
Proximal Shaft	1.9 Fr
Distal Shaft	1.0 to 2.0mm: 2.3Fr 2.5 to 4.0mm: 2.6Fr
Balloon Folding	Tri fold
Inflation/Deflation time	10seconds/25seconds
Guidewire diameter	0.014"
Catheter Length	142 cm
Marked Bands	90cm and 100cm
Nominal Pressure	8 atm
Rated Burst Pressure	16 atm

Size sheet

Balloon diameters	1.00mm, 1.25mm, 1.50mm, 2.00mm 2.50mm, 2.75mm, 3.00mm, 3.25mm, 3.50mm, 3.75mm and 4.00mm
Balloon Lengths	10mm, 15mm, 20mm, 25mm, 30mm, 32mm, 34mm, 36mm, 38mm, 42mm

CE marked

Available in custom sizes, and on OEM and OBL basis.